



# PVX Multimount

## Multifunctional cable management

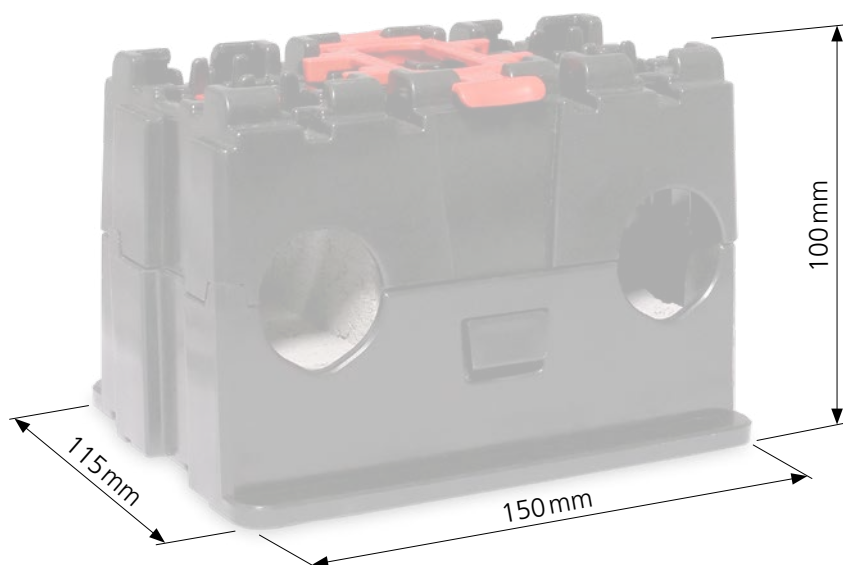


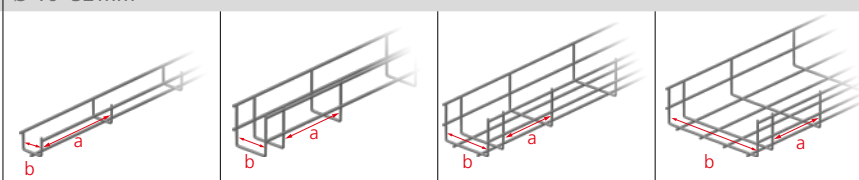

- ▶ Secure placement of cable harnesses, electrical pipes or mesh cable trays
- ▶ Very fast installation without tools with integrated ballasting
- ▶ Tube feedthroughs with simple clamping device
- ▶ Flexible support of the most common wire basket channels
- ▶ Consists of 80 % UV-resistant recycled material



In cooperation with  
 **PVX Multimount**

## Technical data



PVX Multimount®					
Dimensions L x W x H	150 x 115 x 100 mm				
Compatible tubes	Ø 16 - 32 mm				
Compatible mesh cable trays	 <table border="1"> <tr> <td>a = 100 mm b = 35 - 40 mm</td> <td>a = 100 mm b = 45 - 60 mm</td> <td>a = 100 mm b = 65 - 100 mm</td> <td>a = 100 mm b ≥ 100 mm</td> </tr> </table>	a = 100 mm b = 35 - 40 mm	a = 100 mm b = 45 - 60 mm	a = 100 mm b = 65 - 100 mm	a = 100 mm b ≥ 100 mm
a = 100 mm b = 35 - 40 mm	a = 100 mm b = 45 - 60 mm	a = 100 mm b = 65 - 100 mm	a = 100 mm b ≥ 100 mm		
					
Weight	1120 g				
Material	ASA, HDPE 80% recycled, halogen-free				
Maximum load	50 kg				
UV resistant	100 %				
Temperature	-40°C bis +60°C				
Properties ballast block	Frost-resistant, Komo® certificate, 100-year guarantee				
Vertical mounting	2x M6 mounting holes in bottom including rosette				