

June 23, 2022

K2 Systems, LLC  
2835 La Mirada Drive  
Suite A  
Vista, CA 92081



**RE: *Splice Foot XL Rafter and Deck Mounting Evaluation***

To whom it may concern:

Per your request, Moment Engineering + Design has performed a comprehensive structural review of the K2 Systems Splice Foot XL in Rafter and Deck Mounting scenarios. When installed per the conditions and design criteria described herein, the Splice Foot XL specified is compliant with the applicable sections of the design reference documents noted below.

**Design Reference Documents**

- ASCE/SEI 7-16 & 7-10 – *Minimum Design Loads for Buildings and Other Structures*
- AA ADM - *2015 Aluminum Design Manual*, by the Aluminum Association
- AAMA TIR A9-91 – *Metal Curtain Wall Fasteners*

**Overview**

The purpose of this analysis is to provide allowable shear, compression and tensile loads for the K2 Systems Splice Foot XL in various attachment configurations including rafter and deck mounting. K2 Systems has provided load testing data completed by Applied Materials & Engineering, Inc. (AME) of the Splice Foot XL in rafter and deck mounting configurations.

Moment Engineering + Design has reviewed the testing materials and reports provided by K2 Systems and has derived allowable shear, compression and tensile loads per mounting configuration based on the results.

**Methods & Design Parameters**

Calculated allowable loads were based on the following data:

- *Section and materials data provided by K2 Systems*
- *Load/deflection test data provided by K2 Systems*

**Section Properties**

Tested assembly was based the following:

<u>Property</u>	<u>Splice Foot XL</u>
Sx (horizontal axis)	0.354 in <sup>3</sup>
Sy (vertical axis)	0.425 in <sup>3</sup>
A (x-Section)	1.299 in <sup>2</sup>

We appreciate the opportunity to have assisted you with this project. Should you have any further questions regarding this analysis, please feel free to contact us by phone or email.

**K2 Systems, LLC**

2835 La Mirada Drive, Suite A • Vista, CA 92081 • Phone: 760-301-5300 • Web: [www.k2-systems.com](http://www.k2-systems.com)

Best Regards,

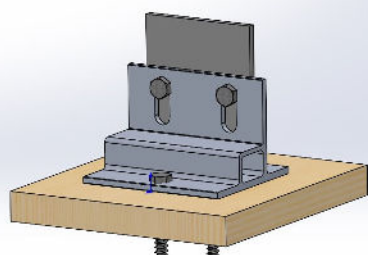
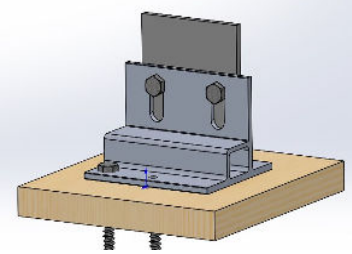
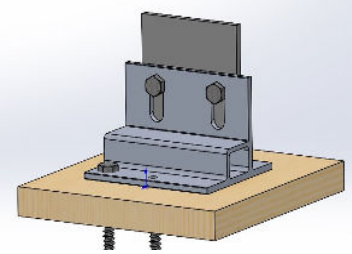
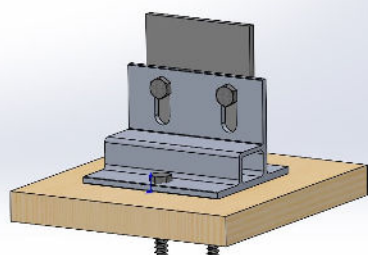


**Shawn Kelley** Digitally signed  
by Shawn Kelley  
Date: 2023.01.25  
11:22:54 -05'00'  
Expires: 11/30/2023

Shawn P. Kelley, P.E.  
**Professional Engineer**  
moment ENGINEERING + DESIGN  
8229 Boone Boulevard, Suite #410  
Vienna, VA 22180  
[spkelley@msegllc.com](mailto:spkelley@msegllc.com)

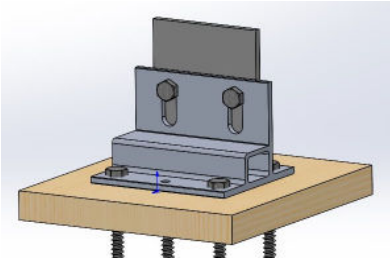
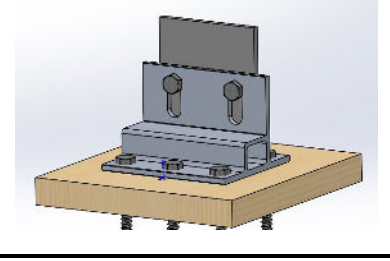
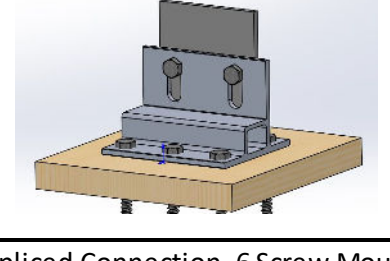
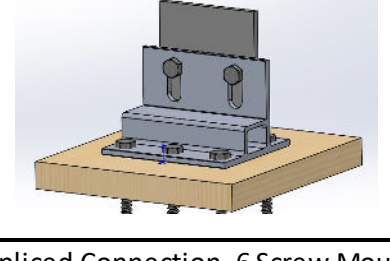
Attachments:

1. Table 1.1: Splice Foot XL – Rafter Mounting Options
2. Table 1.2: Splice Foot XL – Deck Mounting Options

Table 1.1: Splice Foot XL - Rafter Mounting Options	
Note: Rafter attached with M5X60 self-drilling wood screws through 7/16" OSB directly into the rafter (fully threaded, 1-5/8" of embedment into rafter)	
CONFIGURATION	ALLOWABLE LOADS
	ALLOWABLE TENSILE LOAD (LBS):
	700
	ALLOWABLE COMPRESSIVE LOAD (LBS.):
	700
	ALLOWABLE TENSILE LOAD (LBS):
	700
	ALLOWABLE COMPRESSIVE LOAD (LBS.):
	700
	ALLOWABLE SHEAR (LBS.):
	700
	ALLOWABLE TENSILE LOAD (LBS.):
	700
	ALLOWABLE COMPRESSIVE LOAD (LBS.):
	700
	ALLOWABLE SHEAR (LBS.):
	700
Spliced Connection, Center Screw Mount (Rafter Attached)	Note: Allowable loads determined from AME Test Reports; Project No. 1210169C. Safety factor of 2 applied to Ultimate values
Spliced Connection, Offset Screw Mount (Rafter Attached)	Note: Allowable loads determined from AME Test Reports; Project No. 1210169C. Safety factor of 2 applied to Ultimate values

**K2 Systems, LLC**

2835 La Mirada Drive, Suite A • Vista, CA 92081 • Phone: 760-301-5300 • Web: [www.k2-systems.com](http://www.k2-systems.com)

Table 1.2: Splice Foot XL - Deck Mounting Options	
Note: Deck attachment assumes min. 8" distance from all OSB panel edges, 24" maximum O.C. rafter spacing, and attached with M5X60 self-drilling wood screws through 7/16" OSB.	
CONFIGURATION	ALLOWABLE LOADS
	ALLOWABLE TENSILE LOAD (LBS):
	250
	ALLOWABLE COMPRESSIVE LOAD (LBS.):
	450
	ALLOWABLE TENSILE LOAD (LBS):
	250
	ALLOWABLE COMPRESSIVE LOAD (LBS.):
	450
	ALLOWABLE TENSILE LOAD (LBS):
	250
	ALLOWABLE COMPRESSIVE LOAD (LBS.):
	450
	ALLOWABLE SHEAR (LBS.):
	250
	ALLOWABLE SHEAR (LBS.):
	300
Spliced Connection, 4 Screw Mount (Deck Attached)	Note: Allowable loads determined from AME Test Reports; Project No. 1210169C. Safety factor of 2 applied to Ultimate values
Spliced Connection, 5 Screw Mount (Deck Attached)	Note: Allowable loads determined from AME Test Reports; Project No. 1210169C. Safety factor of 2 applied to Ultimate values
Spliced Connection, 6 Screw Mount (Deck Attached)	Note: Allowable loads determined from AME Test Reports; Project No. 1210169C. Safety factor of 2 applied to Ultimate values