![K2 systems logo] **PVX Multimount**

Multifunctional cable management

3× flexible mesh cable tray holders

Integrated ballast

2× tube feedthroughs Ø 16 - 32 mm

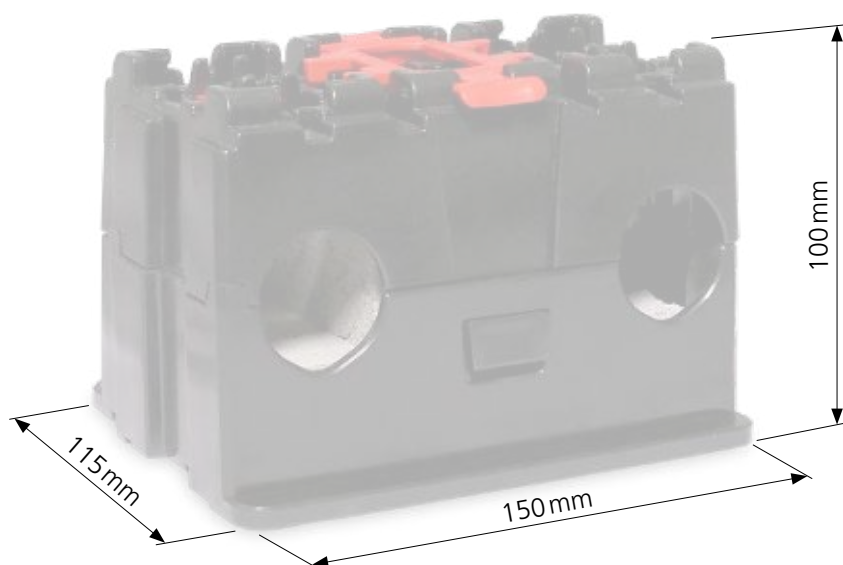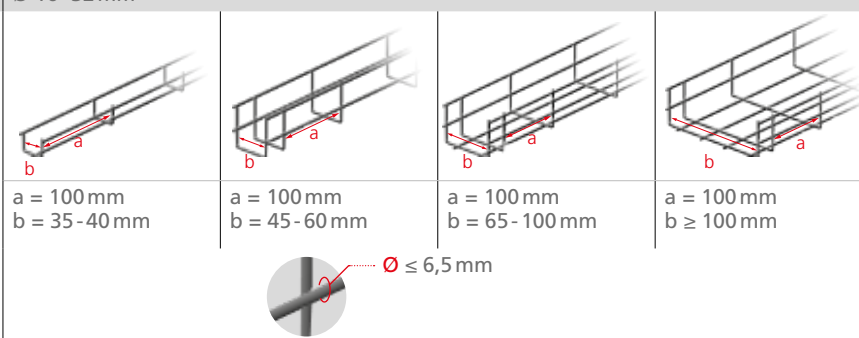UV-resistant RC plastic
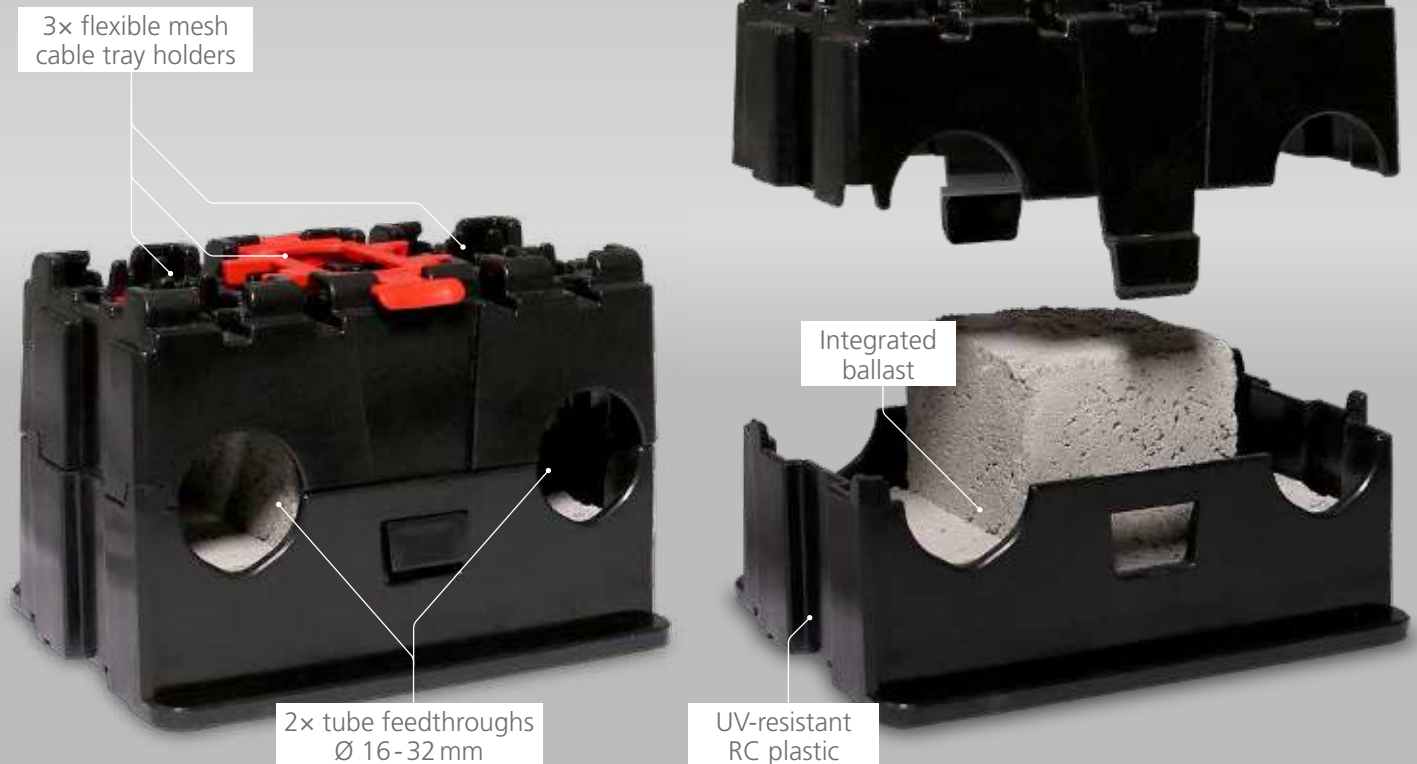
▸ Secure placement of cable harnesses, electrical pipes ormesh cable trays

▸ Very fast installation without tools with integrated ballasting

▸ Tube feedthroughs with simple clamping device

▸ Flexible support of the most common wire basket channels

▸ Consists of 80 % UV-resistant recycled material

In cooperation with

PVX Multimount

Technical data

	PVX Multimount®			
Dimensions L × W × H	150 × 115 × 100 mm			
Compatible tubes	Ø 16 - 32 mm			
Compatible mesh cable trays				
	a = 100 mm b = 35 - 40 mm	a = 100 mm b = 45 - 60 mm	a = 100 mm b = 65 - 100 mm	a = 100 mm b ≥ 100 mm
	Ø ≤ 6,5 mm			
Weight	1120 g			
Material	ASA, HDPE 80% recycled, halogen-free			
Maximum load	50 kg			
UV resistant	100 %			
Temperature	-40°C bis +60°C			
Properties ballast block	Frost-resistant, Komo® certificate, 100-year guarantee			
Vertical mounting	2× M6 mounting holes in bottom including rosette			